



MAXIEM Direct Drive Pump

With thousands installed worldwide, the MAXIEM® Direct Drive Pump is proven to provide reliable performance in any work environment. Utilizing the same variable frequency drive technology as the market-leading OMAX EnduroMAX® pump, the MAXIEM Direct Drive Pump has the flexibility to vary the motor RPM to cover both low and high pressure operation. The pump's three cylinders are coordinated to provide a smooth high pressure output flow, without significant pressure fluctuations. The cutting power of any waterjet system is not motor horsepower or even pump pressure, but nozzle horsepower, or JetPower™. The MAXIEM Direct Drive Pump, due to its high efficiency, delivers some of the highest JetPower in the industry. The pump's simple design with a minimum footprint makes it easy to install and maintain, while its eco-friendly design provides quiet and clean operation.


FEATURES

- Simple industry-proven and robust pump design
- Highly reliable design capable of over 500 cutting hours between maintenance cycles
- Variable Frequency Drive reduces startup power consumption and maximizes operating flexibility
- Continuous 50,000 psi operation for faster part processing
- One of the lowest pump operating noise levels in the industry
- Optional Water Recycling System for closed loop operation
- Integrated charge pump with pressure tank
- Available in 20 hp, 30 hp, and 40 hp models
- Increased productivity with operating efficiencies up to 85%
- The MAXIEM DualPUMP option boosts power up to 80 hp

BENEFITS

- Advanced direct drive pump technology lowers operating costs and increases pump operating life
- Continuously adjustable VFD technology significantly expands pump capabilities by controlling output flow rate and pressure
- Lower overall energy costs compared to inefficient intensifier pump designs
- Simple design provides easy access to all major components
- Direct drive pump technology delivers the highest JetPower in the industry for faster and more efficient cutting
- Environmentally "green" system with quiet and clean operation and low electrical consumption
- Made in the USA alongside the MAXIEM JetMachining® Center for maximum compatibility

DIRECT DRIVE PUMP

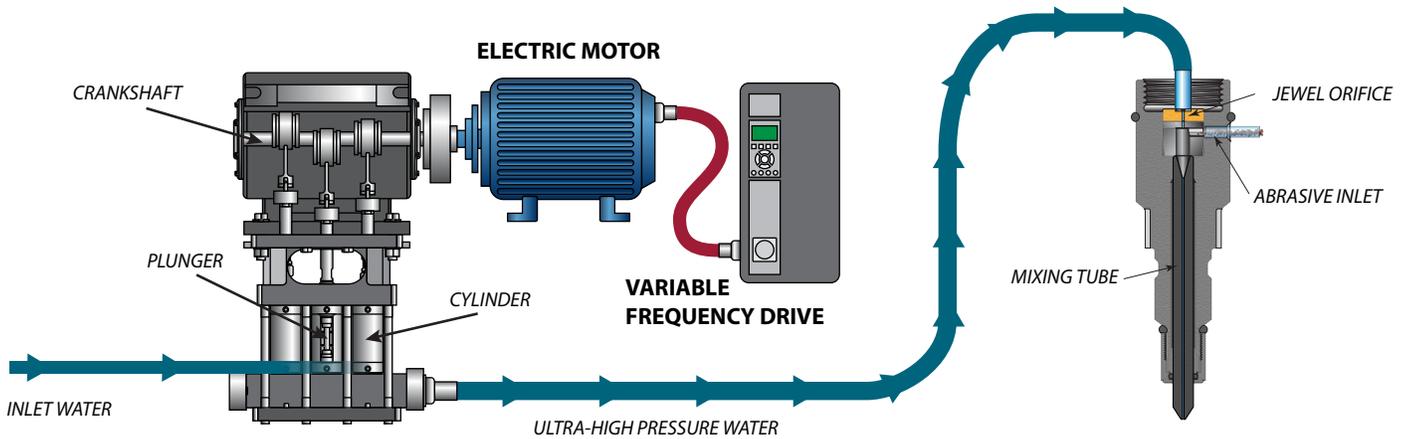

	MOTOR POWER	MAXIMUM JET POWER ¹	OUTPUT PRESSURE	ORIFICE AND FLOW RATE ²	DIMENSIONS
M20	20 HP (15 kW)	17 HP (12.5 kW)	50,000 psi (3,450 bar)	0.011" / 0.52 gpm (0.28mm / 1.97 lpm)	52.5" x 31" x 42" (1,334mm x 787mm x 1,067mm)
M30	30 HP (22 kW)	25.5 HP (19 kW)		0.014" / 0.84 gpm (0.36mm / 3.18 lpm)	
M40	40 HP (30 kW)	34 HP (25 kW)		0.016" / 1.09 gpm (0.41mm / 4.13 lpm)	

¹ JetPower is directly proportional to the water pressure at the nozzle times the volume flow rate of the waterjet stream.

² Recommended maximum orifice size. Smaller orifice sizes have a corresponding lower flow rate.



DUALPUMP PACKAGE

The DualPUMP Package offers unprecedented cutting speed and performance up to 80 hp. It is designed for shops with high capacity production demands to cut thick materials and utilize multiple nozzle operation. It is easy to switch between high power mode and redundancy operation, resulting in the fastest cutting performance and the highest degree of flexibility and reliability that high pressure systems can offer.

With the DualPUMP Package, you will never again need to take a machine offline for scheduled pump maintenance, as the machine can operate on one pump while the second undergoes maintenance. The increase in machine cutting capacity can satisfy more customer demands and can significantly lower the cost per finished part, which helps the user obtain a competitive advantage over other systems.



ABOUT OMAX

OMAX is the global total solutions provider in advanced abrasive waterjet systems. Our intuitive Intelli-MAX Software Suite simplifies programming and reduces setup times, increasing your productivity. OMAX engineers continue to innovate technology for abrasive waterjet machining, from proven 4th generation pump designs to cutting edge drive systems with micron-level accuracy. With the largest abrasive waterjet support network in the world, OMAX continues to shape the future of waterjets.

To see how a MAXIEM JetMachining Center can save you time and money, call or visit our website and request a free part analysis today.



UL 508A, CAN/CSA C22.2 No. 14, CAN/CSA C22.2 No. 73
Specifications subject to change without notice.
600117E © OMAX Corporation October 2014

WWW.OMAX.COM

Made in the USA

OMAX CORPORATION

21409 72nd Avenue South
Kent, WA 98032

TEL 1-253-872-2300 / 1-800-838-0343

FAX 1-253-872-6190

